

型号识别 Model identification

GDS-25 SK 1/2 6 N S I S

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


①系列代码 Series Symbol	GDS-不锈钢 Stainless Steel 304#	GDT-钛金属 Titanium Metal
②出口口径 Outlet size	25:1" 40:1-1/2" 50:2" 65:2-1/2" 80:3"	
③比重 Specific Weight	SK-1.1" SP-1.4"	
④马力 Motor Power	1/2:1/2HP 1:1HP 2:2HP 3:3HP 5:5HP 7:7.5HP 10:10HP	
⑤频率Frequency	5:50HZ 6:60HZ	

⑥O环 O-Ring	N:NBR E:EPDM V:VITON T:TEFLON
⑦泵体材质 Material	S:SUS 304 T:钛 Titanium
⑧安装型式 Installation	I-槽内安装 Internal S-槽外安装 External
⑨标准/特殊 Standard/Special	S-特殊规格 Special Specifications N-标准机型 Standard Model

规格表 Specifications

型号Model	比重 Specific Weight	进出口径 In-outlet (mm)	马力 Power			50HZ			60HZ			重量 Weight (kg)
			相数 Phase	HP	极数 Poles	曲线 NO	扬程 Head(m)	流量Flow (L/min)	曲线 NO	扬程 Head(m)	流量Flow (L/min)	
GDS-25SK-1/2	1.1	1"×1"	1,3	1/2	2	a	13	95	A	12.5	105	26
GDS-40SK-1	1.1	1 1/2"×1 1/2"	1,3	1	2	b	10	310	B	10	300	29
GDS-40SK-2	1.1	1 1/2"×1 1/2"	3	2	2	c	14.5	350	C	17.5	350	32
GDS-50SK-3	1.1	2"×2"	3	3	2	d	19.5	540	D	20.5	540	56
GDS-50SK-5	1.1	2"×2"	3	5	2	e	22	600	E	31	580	72
GDS-65SK-7.5	1.1	3"×2 1/2"	3	7.5	2	f	22	860	F	28	800	116
GDS-65SK-10	1.1	3"×2 1/2"	3	10	2	g	22	860	G	31	1050	122
GDS-40SP-1	1.4	1 1/2"×1 1/2"	1,3	1	2	h	9	280	H	8	260	29
GDS-40SP-2	1.4	1 1/2"×1 1/2"	3	2	2	i	14.5	340	I	15	325	32
GDS-50SP-3	1.4	2"×2"	3	3	2	j	17	500	J	17	500	54
GDS-50SP-5	1.4	2"×2"	3	5	2	k	22	600	K	23	540	72
GDS-65SP-7.5	1.4	3"×2 1/2"	3	7.5	2	l	20	760	L	28	800	116
GDS-65SP-10	1.4	3"×2 1/2"	3	10	2	m	22	920	M	31	850	122
GDS-40SL-1/2	1.4	1 1/2"×1 1/2"	3	1/2	4	o	4.5	195	O	6.5	240	29
GDS-50SL-1	1.4	2"×2"	3	1	4	p	5	390	P	7.5	470	45
GDT-40SK-1/2	1.1	1 1/2"×1 1/2"	1,3	1/2	2	n	9	180	N	9	150	24
GDT-40SK-1	1.1	1 1/2"×1 1/2"	1,3	1	2	b	10	310	B	10	300	27
GDT-40SK-2	1.1	1 1/2"×1 1/2"	3	2	2	c	14.5	350	C	17.5	350	30

安装尺寸 Installation dimensions

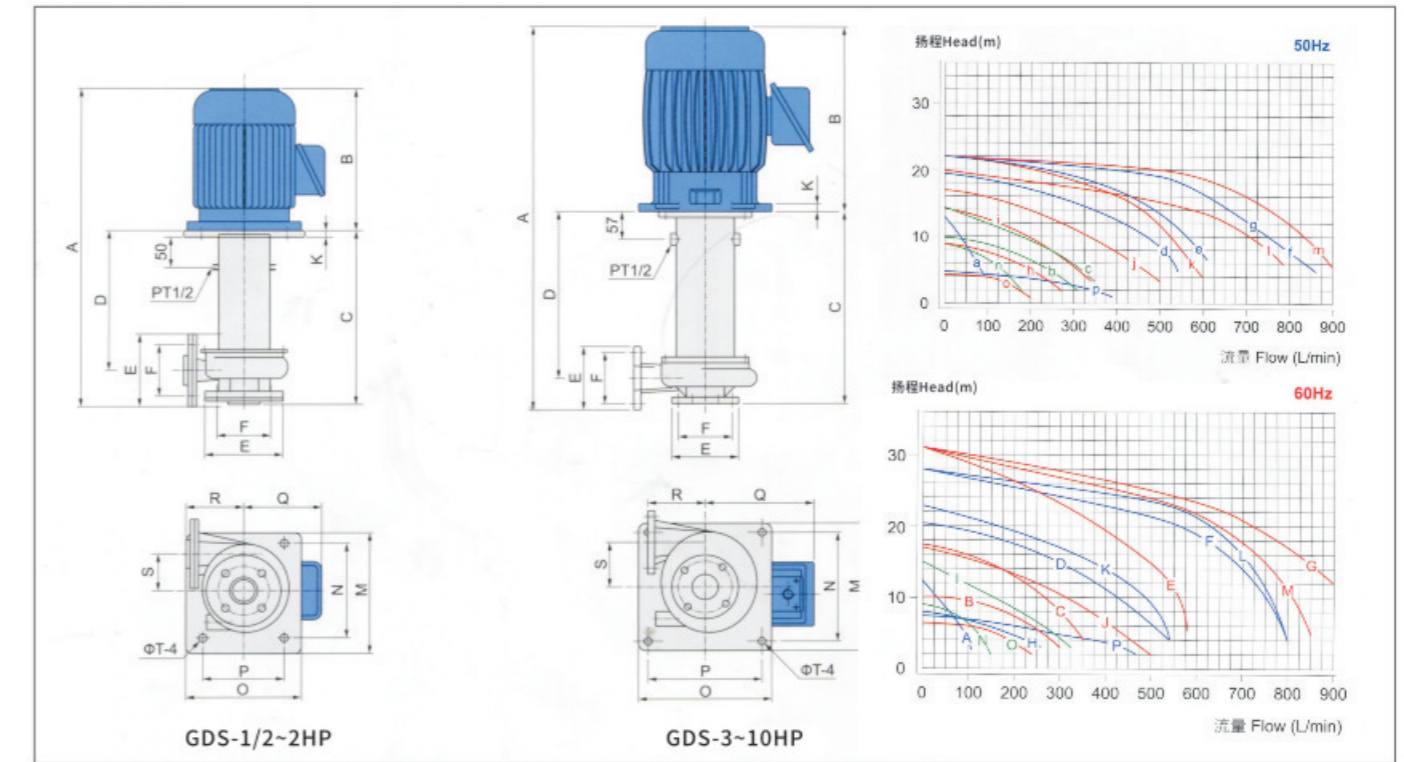

型号Model	A	B	C	D	E	F	K	M	N	O	P	Q	R	S	T
GDS-25SK/SP-1/2	542	242	300	235	78	64	2	230	80	20	148	142	117	60	5
GDS-40SK/SP-1	552	242	310	247	8	92	2	230	80	20	148	142	135	73	5
GDS-40SK/SP/GDT-2	585	275	310	247	8	92	2	230	80	20	148	142	135	73	5
GDS-50SK/SP-3	733	340	393	340	130	103	16	260	222	260	222	92	133	90	5
GDS-50SK/SP-5	773	380	393	340	130	103	16	260	222	260	222	22	133	90	5
GDS-65SK/SP-7.5	856	440	416	343	175	127	20	350	300	350	300	250	161	95	5
GDS-65SK/SP-10	856	440	416	343	175	127	20	350	300	350	300	250	161	95	5
GDS-40SK-1/2	552	242	310	247	8	92	2	230	80	20	148	142	135	73	5
GDS-40SL-1/2	552	242	310	247	8	92	2	230	80	20	148	142	135	73	5
GDS-50SL-1	688	295	393	343	130	103	16	260	222	260	222	167	133	90	5
GDT-40SK-1/2	552	242	310	247	8	92	2	230	80	20	148	142	135	73	5
GDT-40SK-1/40SK-2	585	275	310	247	8	92	2	230	80	20	148	142	135	73	5